


EPC-5133WRS-7200

The whole piece adopts ultra-thin frame, all aluminum alloy structure, fanless and fully enclosed design, It is more suitable for embedded installation to meet the needs of different devices in different environments. Widely used in industrial control, military, communications, electric power, and other high-end fields.

Features

- 3mm Super Thin Front Bezel, Best for Embedded Cabinet.
- High precision die-casting aluminum molding, pure plane wire drawing.
- process design, dustproof and waterproof.
- Self-developed fanless X86 architecture industrial motherboard
- Conform to EMC anti electromagnetic interference standard.
- Industrial protection, applicable to various harsh environments.
- Equipped with dual networks, supporting 12-36V wide voltage power supply;
- Rich interfaces and strong extensibility.



Product Model

Product Size	13.3"
Non-touch	EPC-5133WNT
Capacitive touch	EPC-5133WCP
Resistive touch	EPC-5133WRS

Product Interface



Product Specifications

Screen Parameters

LCD Size	13.3" TFT LCD
Resolution	1920×1080
Viewing Angle	85/85/85/85 (L/R/U/D)
Colour	16.7M
Brightness	220 cd/m²
Contrast ratio	1000:1

Touch Screen

Touch screen type	Resistive touch screen
Light transmittance	≥78%
Input mode	Fingertip or touch pen
Controller communication	USB


Hardware Configuration

CPU	I5-6200U	I5-7200U	I5-8265U	I5-10210U
CPU frequency	2.3GHz	2.5GHz	1.6GHz	1.6GHz
Integrated graphics	Intel HD Graphic 520	Intel HD Graphics 620	Intel Ultra HD Graphics 620	Intel UHD620 Graphics
RAM	4G DDR4(Optional 8G/16G/32G)	4G DDR4(Optional 8G/16G/32G)	4G DDR4(Optional 8G/16G/32G)	8G DDR4(Optional 16G/32G /64G)
Storage	128G SSD (Optional 256/512G)			
WiFi	2.4GHz / 5GHz dual bands			
Bluetooth	BT4.0(Optional)			
Operating system	Windows7/10/11; Ubuntu16.04.7/8.04.5/20.04.3; Centos7.6/7.8			
Other support	Support RTC real-time clock and timing switch			

Power parameters

Input voltage	DC 12V~36V	Static power	18W
---------------	------------	--------------	-----

Product size

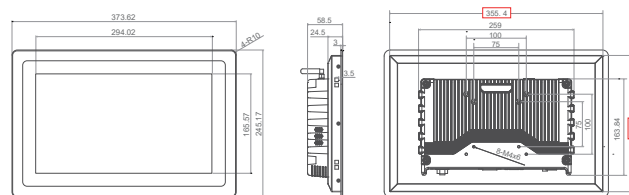

Physical Characteristics

Overall dimensions	W373.62x H245.17x D58.5mm
Size of opening	W357.4 x H229mm

Interface

DC	1*DC 2.5
HDMI	1*HDMI, Support HDMI data output, maximum support 1080P
USB	2*USB 2.0 2*USB 3.0
LAN	2*LAN, Dual 1000M adaptive Ethernet
AUDIO	1*Audio I/O, Support audio input and output
SMI card	Standard SIM card interface, supporting various standards (depending on 3G/4G module)
VGA	1*VGA
RS232	2*RS232(Optional RS485, RS422, GPIO)
POWER	1*POWER
Industrial terminal	1*Industrial terminal

Product Reliability

Working Temperature	-10°C to 60°C
Storage temperature	-20°C to 70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, half sine wave, duration 11ms
Authentication	CCC/CE/FCC/EMC/CB/ROHS
Waterproof	Front panel reaches IP65 protection level